
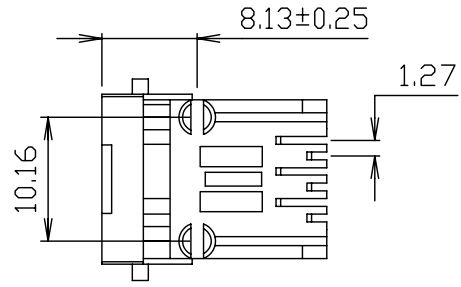


SUGGESTED PCB LAYOUT
TOP VIEW

XRJK-S-01-6-6-0-9A1

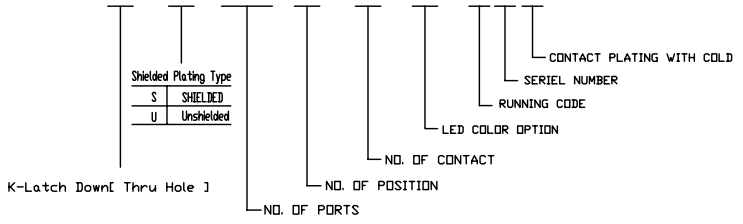

NOTES:

- MATERIAL: HOUSING-PBT POLYESTER UL94V-0 MIXED GLASS FIBER, STANDARD COLOR-BLACK
TERMINAL-0.35mm THICK PHOS-BORNZE PLATED WITH 15u" GOLD AND TIN IN SOLDER AREA.
SHIELD-0.25mm THICK COPPER ALLOY, PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

RoHS Compliant

				XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chiu, Taipei, Taiwan 11475
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWG NO: XRJK-S-01-6-6-0-9A1
TITLE: RJ11 Connectors, w/O LED, 6P, 6C, Shielded, Thru-Hole				DRAWN: AGGIE
PART NO: XRJK-S-01-6-6-0-9A1				CHKD: JEFF
		UNIT mm[inch]	SHEET 1 of 1	REV 01
				DATE: 22/09/05