


SUGGESTED PCB LAYOUT
TOP VIEW

XRJK-S-01-6-6-0-9C1

Shielded Plating Type	SERIAL NUMBER	CONTACT PLATING WITH GOLD
S SHIELDED		
U Unshielded	RUNNING CODE	
	LED COLOR OPTION	
	NO. OF CONTACT	
	NO. OF POSITION	
	NO. OF PORTS	

K-Latch Down [Thru Hole]

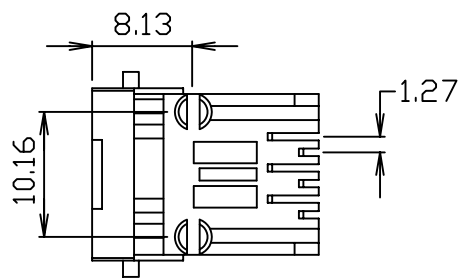

NOTES :

- MATERIAL: HOUSING-PBT POLYESTER UL94V-0
MIXED GLASS FIBER.
STANDARD COLOR-BLACK
CONTACTS-0.35mm THICK PHOS-BORNZE
PLATED WITH 15u" GOLD AND
TIN IN SOLDER AREA.
SHIELD-0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

RoHS Compliant

		CONNECTING THE INFORMATION AGE	
		G/NO:	
MULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chu, Taipei, Taiwan 11475		MULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.			
TITLE:		DRAWN:	
RJ11 Connectors, w/o LED, 6P, 6C, Shielded, Thru-Hole		AUSTIN	
PART NO:		CHKD:	
XRJK-S-01-6-6-0-9C1		JEFF	
UNIT		SHEET	REV
mm [inch]		1 of 1	01
DATE:		Jan.13,06	