
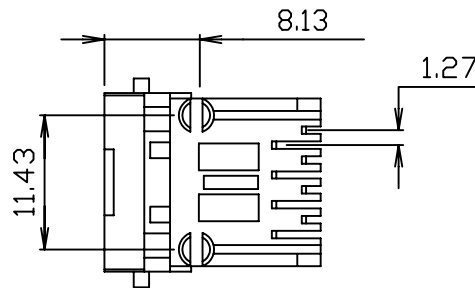


SUGGESTED PCB LAYOUT
TOP VIEW

XRJK-S-01-8-8-0-9C1

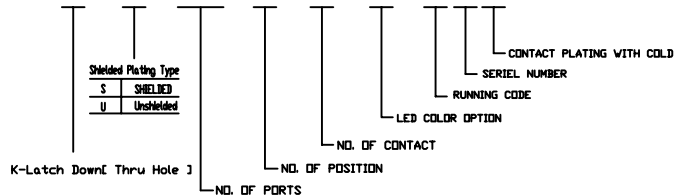

NOTES:

1. MATERIALS:

HOUSING-PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR-BLACK
CONTACTS-0.35mm THICK PHOS-BORNZE PLATED WITH 15u" GOLD AND TIN
IN SOLDER AREA.

SHIELD-0.25mm THICK COPPER ALLOY, PLATED WITH NICKEL.

2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68,
SUBPART F

3. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

RoHS Compliant

		CONNECTING THE INFORMATION AGE	
		G/ND:	
X MULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chu, Taipei, Taiwan 11475		X MULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.			
TITLE:		DRAWN:	
RJ45, Connectors, W/O LED, 8P, 8C, Shielded, Thru-Hole		AUSTIN	
PART NO:		CHKD:	
XRJK-S-01-8-8-0-9C1		JEFF	
UNIT		SHEET	REV
mm [inch]		1 of 1	01
DATE:		DATE:	
		Jan.13,06	