
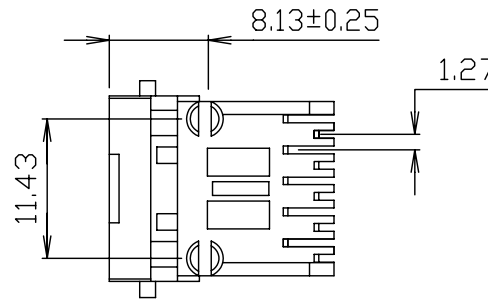


SUGGESTED PCB LAYOUT
TOP VIEW

XRJK-S-01-A-A-0-9C1

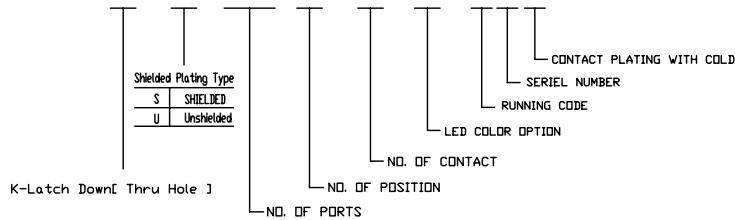

NOTES:

- MATERIALS:
HOUSING-PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR-BLACK
CONTACTS-0.35mm THICK PHOS-BORNZE PLATED WITH 15u" GOLD AND TIN
IN SOLDER AREA.
SHIELD-0.25mm THICK COPPER ALLOY, PLATED WITH NICKEL.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68,
SUBPART F
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

RoHS Compliant

X MULTIPLE		CONNECTING THE INFORMATION AGE	
MULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chu, Taipei, Taiwan 11475		MULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/ND:	
TITLE: RJ45 Connectors, w/LED,10P,10C, Shielded, Thru-Hole		DWG NO: XRJK-S-01-A-A-0-9C1	
PART NO: XRJK-S-01-A-A-0-9C1		DRAWN: AGGIE	
		CHKD: JEFF	
UNIT mm[inch]		SHEET 1 of 1	
REV 01		DATE: 21/09/05	