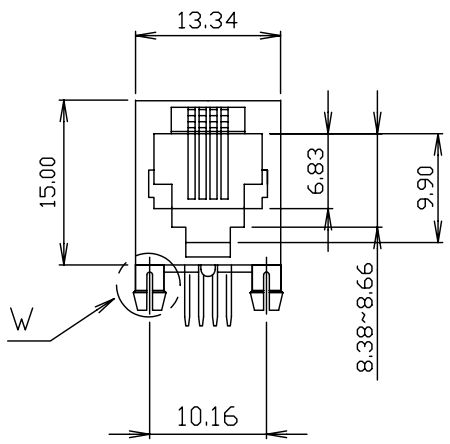

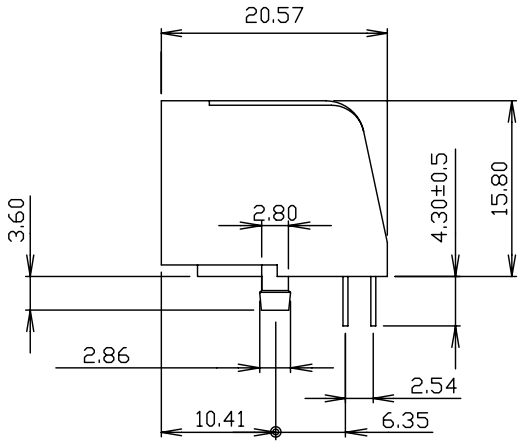

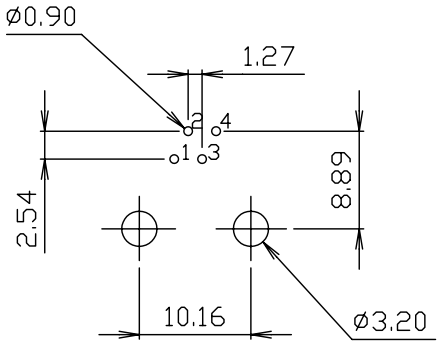

SUGGESTED PCB LAYOUT
TOP VIEW

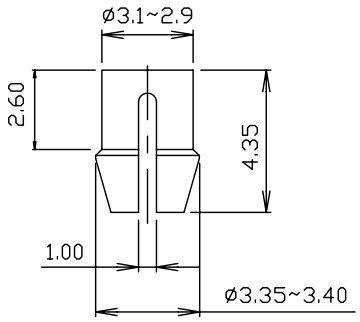

DETAIL W

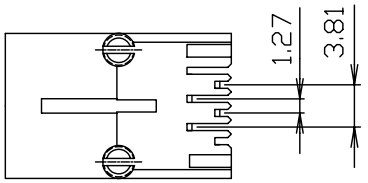

XRJK-U-01-6-4-0-9U3

Shielded Plating Type	
S	SHIELDED
U	Unshielded

- K-[Latch Down Thru Hole]
- Shielded Plating Type
- NO. OF PORTS
- NO. OF POSITION
- NO. OF CONTACT
- LED COLOR OPTION
- RUNNING CODE
- SERIEL NUMBER
- CONTACT PLATING WITH COLD

NOTES:

1. MATERIALS:
   HOUSING-PBT POLYESTER UL94V-0
   MIXED GLASS FIBER.
   STANDARD COLOR-BLACK
   TERMINAL-0.35mm THICK PHOS-BRONZE
   PLATED WITH 50u" GOLD AND
   TIN IN SOLDER AREA.
2. JACK CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
   PART 68,SUBPART F.
3. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
   .X ±0.30[0.012]

RoHS Compliant

XMULTIPLE — CONNECTING THE INFORMATION AGE

XMULTIPLE ASIA
4F, No. 347,Yang Guang St.,
Neihu Chiu , Taipei , Taiwan 11475

XMULTIPLE USA
1420 Los Angeles Ave., Suite G,
Simi Valley, CA 93065

THIS DRAWING IS A CONTROLLED DOCUMENT.

TITLE: RJ11 Connectors, W/O LED, 6P,4C, Unshielded, Thru-Hole

PART NO: XRJK-U-01-6-4-0-9U3

UNIT	SHEET	REV
mm[inch]	1 of 1	01

G/NO:
DWG NO: XRJK-U-01-6-4-0-9U3
DRAWN: AUSTIN
CHKD: JEFF
DATE: Jan.11,06