


SUGGESTED PCB LAYOUT
TOP VIEW

XRJK-U-01-8-8-0-9G4

K-[Latch Down Thru Hole W/O LED]
 NO. OF PORTS
 NO. OF POSITION
 NO. OF CONTACT
 LED COLOR OPTION
 RUNNING CODE
 SERIAL NUMBER
 CONTACT PLATING WITH GOLD

Shielded Plating Type	
S	Shielded
U	Unshielded

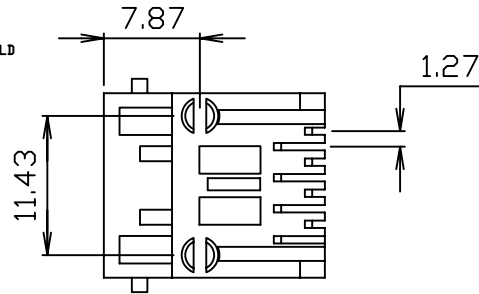

NOTES:

- MATERIALS:
HOUSING-PBT POLYESTER UL-94V-0 MIXED GLASS FIBER.
STANDARD COLOR-BLACK
CONTACTS-0.35mm THICK PHOS-BRONZE PLATED WITH 6u' GOLD AND TIN IN SOLDER AREA.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

RoHS Compliant

XMULTIPLE		CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO:	
TITLE: RJ45 Connectors, W/O LED, 8P, 8C, Unshielded, Thru-Hole		DWG NO: XRJK-U-01-8-8-0-9G4	
PART NO: XRJK-U-01-8-8-0-9G4		DRAWN: LEON	
		CHKD: JEFF	
		DATE: Jan.16,06	
UNIT mm[inch]		SHEET 1 of 1	REV 01