


SUGGESTED PCB LAYOUT
(TOP VIEW)

XRJM-U-01-6-6-0-9L5

Shielded Plating Type	CONTACT PLATING WITH GOLD
S SHIELDED	SERIAL NUMBER
U Unshielded	RUNNING CODE
M-[Thru Hole]	LED COLOR OPTION
	NO. OF CONTACT
	NO. OF POSITION
	NO. OF PORTS

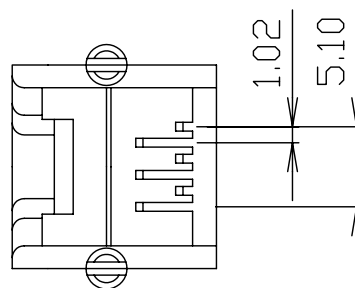

NOTES:

- MATERIALS:
HOUSING-PBT POLYESTER UL94V-0
MIXED GLASS FIBER. STANDARD COLOR-GRAY.
CONTACTS-0.45mm DIAMETER PHOS-BRONZE, PLATED WITH GOLD FLASH.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

RoHS Compliant

X MULTIPLE		CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO:	
TITLE: RJ11 Connectors, W/O LED, 6P, 6C, Unshielded, Thru-Hole		DWG NO: XRJM-U-01-6-6-0-9L5	
PART NO: XRJM-U-01-6-6-0-9L5		DRAWN: AUSTIN	
		UNIT	REV
		mm[inch]	01
SHEET		DATE:	
1 of 1		Jan.10,06	