


SUGGESTED PCB LAYOUT  
TOP VIEW

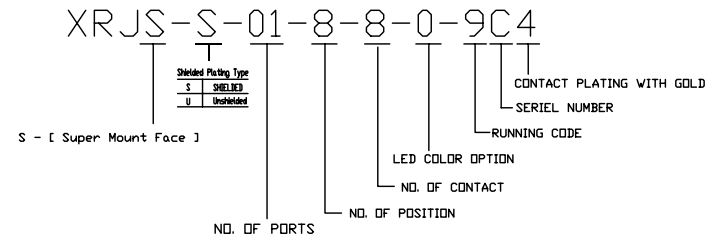

NOTES:

- MATERIAL: HOUSING-PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR-BLACK CONTACTS-0.35mm THICK PHOS-BRONZE PLATED WITH 6u" GOLD AND TIN IN SOLDER AREA. SHIELD-0.25mm THICK COPPER ALLOY, PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]  
.X ±0.30[0.012]

RoHS Compliant

				CONNECTING THE INFORMATION AGE	
				G/ND:	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chiu, Taipei, Taiwan 11475		XMULTIPLE USA 1402 Los Angeles Ave., Suite G, Simi Valley, CA 93065		DWG NO: XRJS-S-01-8-8-0-9C4	
THIS DRAWING IS A CONTROLLED DOCUMENT.					
TITLE: RJ45 Connectors, w/D LED, 8P,8C, Shielded, SMT TYPE		PART NO: XRJS-S-01-8-8-0-9C4		DRAWN: TARA	
		UNIT mm[inch ]	SHEET 1 of 1	REV 01	CHKD: JEFF
				DATE: Jan.18,06	