


SUGGESTED PCB LAYOUT
TOP VIEW

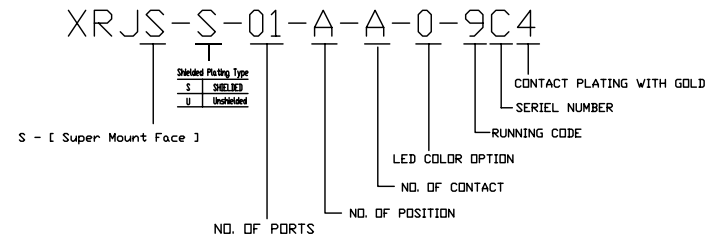

NOTES:

- MATERIAL: HOUSING-PBT POLYESTER UL94V-0
MIXED GLASS FIBER.
STANDARD COLOR-BLACK
CONTACTS-0.35mm THICK PHOS-BRONZE
PLATED WITH 6u" GOLD AND
TIN IN SOLDER AREA.
SHIELD-0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

RoHS Compliant

XMULTIPLE USA 1402 Los Angeles Ave., Suite G, Simi Valley, CA 93065		G/NO:	
THIS DRAWING IS A CONTROLLED DOCUMENT.			
TITLE: RJ45 Connectors, w/D LED, 10P, 10C, Shielded, SMT TYPE		DWG NO: XRJS-S-01-A-A-0-9C4	
PART NO: XRJS-S-01-A-A-0-9C4		DRAWN: AUSTIN	
		UNIT mm[inch]	
		SHEET 1 of 1	
		REV 01	
		DATE: Jan.16,06	