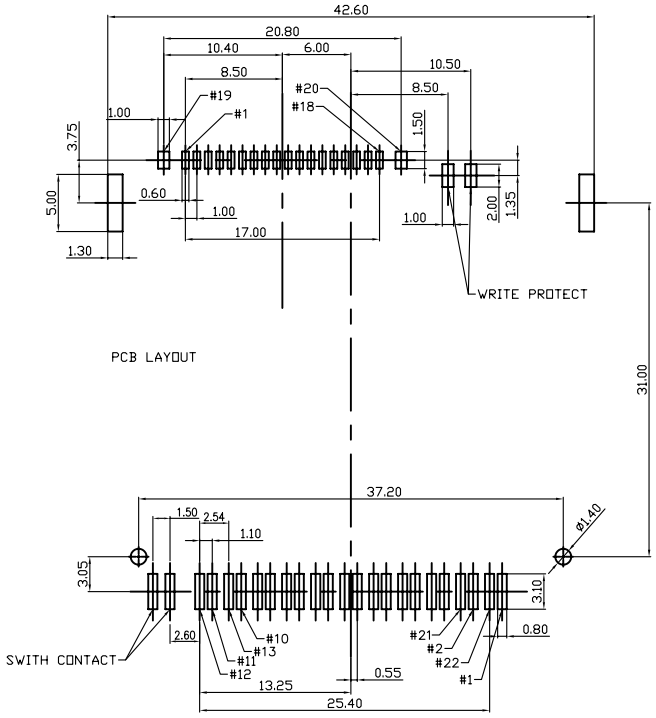

PCB LAYOUT

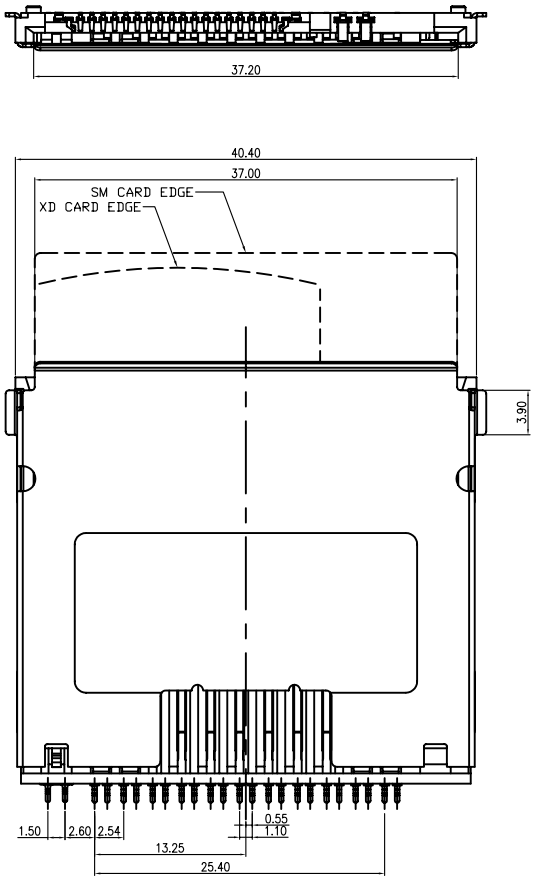





Notes:

1.Material:

Housing:High Themoplastic, UL 94 V-0, Black.

Terminal:Phosphor Bronze.

Cover:Brass.

2.Finish:

Terminal:Underplate:50u" Nickel, Contact area 10u" Au plated.

Soldertail:100u" Tin/Lead.

Cover:Underplate:50u" Nickel.

Ped:Goldflash over Nickel plate.

3.UNSPECIFIED TOLERANCE: .XX ±0.25[0.010] .X ±0.30[0.012]

XMULTIPLE			CONNECTING THE INFORMATION AGE
XMULTIPLE ASIA 4F, No. 347,Yang Guang St., Neihu Chiu , Taipei , Taiwan 11475	XMULTIPLE USA 543 Country Club Drive #B 128 Simi Valley, CA 93065		CUSTOMER/NO:
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWG NO: XSXC-0-42M4-K010-30
TITLE: SM+XD 2 In 1 For 1CAV, Without Protection			DRAWN: TARA
PART NO: XSXC-0-42M4-K010-30			CHKD: JEFF
DIMENSIONS	SHEET	REV	DATE: 14/10/04
mm[inch]	1 of 1	01	