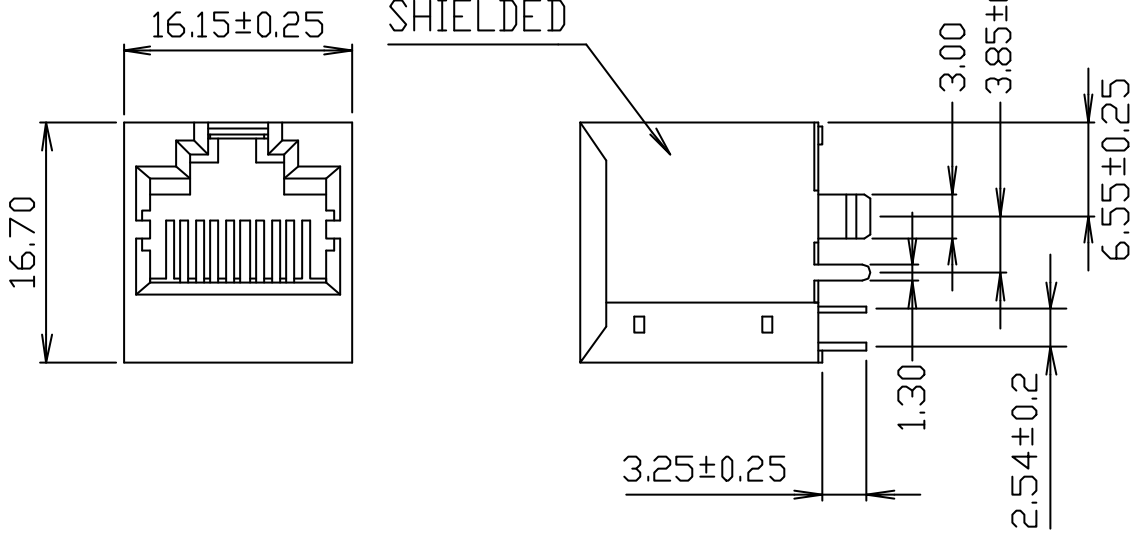

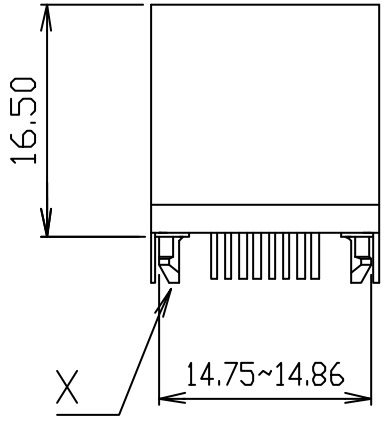

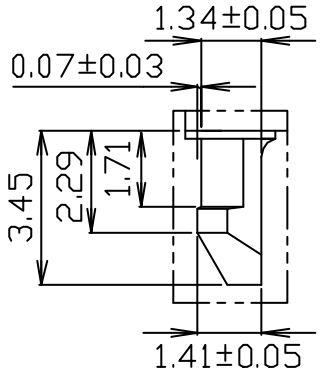

DETAIL X

NOTES:

1. MATERIALS:
   HOUSING-PBT POLYESTER UL94V-0
   MIXED GLASS FIBER.
   STANDARD COLOR-BLACK
   CONTACTS-0.35mm THICK PHOS-BRONZE
   PLATED WITH HARD GOLD AND
   TIN/LEAD IN SOLDER AREA.
   SHIELD-0.25mm THICK COPPER ALLOY,
   PLATED WITH TIN/LEAD.
2. CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.
3. UNSPECIFIED TOLERANCE: .XX ±0.13[0.005]
   .X ±0.25[0.01]

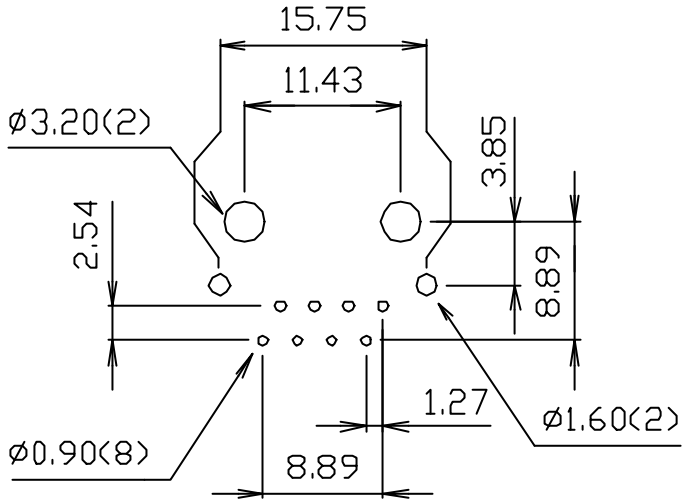

PC Board Layout

XMULTIPLE

CONNECTING THE INFORMATION AGE

XMULTIPLE ASIA
4F, No. 347, Yang Guang St.,
Neihu Chiu , Taipei , Taiwan 11475

XMULTIPLE USA
543 Country Club Drive #B 128
Simi Valley, CA 93065

THIS DRAWING IS A CONTROLLED DOCUMENT.

TITLE: 8 POSITION FLAT PIN SHIELDED
TOP ENTRY PCB JACK

PART NO: XRJV-S-01-8-8-0-902

DIMENSIONS	SHEET	REV
mm [Inch]	1 of 1	01

G/NO: 9646-8813-SD
DWG NO: XRJV-S-01-8-8-0-902
DRAWN: TARA
CHK'D: FUTIEN
DATE: 09/07/03'