


SUGGESTED PCB LAYOUT TOP VIEW PCB LAYOUT TOLERANCE .XX±0.05[0.002]

NOTES:

- MATERIALS:
 - HOUSING-DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL 94V-0
 - TERMINAL -0.35mm THICK PHOS-BRONZE
PLATED WITH 30u" GOLD AND
TIN/LEAD IN SOLDER AREA.
 - HOLD DOWN-0.35mm THICK COPPER ALLOY,
PLATED WITH TIN-LEAD.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

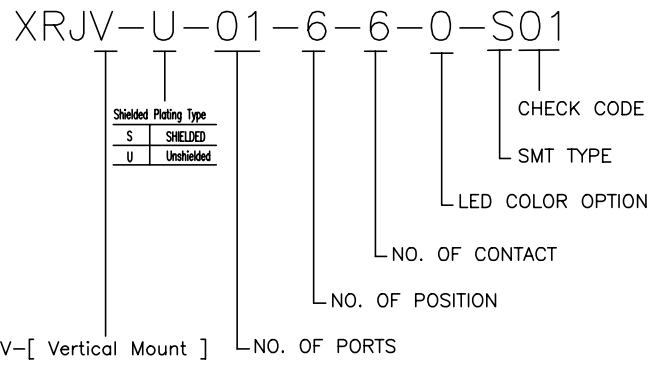

NOTE:

- A AND B HIGHEST POINT MUST OVER C FLAT SURFACE.
- THE MAXIMUM DISTANCE (0.15m/m) BETWEEN LOWEST AND HIGHEST ON A AND B FLAT SURFACE.

XMULTIPLE		CONNECTING THE INFORMATION AGE
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chiu, Taipei, Taiwan 11475		XMULTIPLE USA 543 Country Club Drive #B 12B Simi Valley, CA 93065
THIS DRAWING IS A CONTROLLED DOCUMENT.		CUSTOMER/NO:
TITLE: RJ11 Jack, W/o LED, 6P, 6C, Unshielded, Vertical Mount, SMT		DWG NO: XRJV-U-01-6-6-0-S01
PART NO: XRJV-U-01-6-6-0-S01		DRAWN: TARA
		CHKD: JEFF
DIMENSIONS mm[inch]		DATE: 30/07/04
SHEET 1 of 1		REV 01