


XMULTIPLE PART NUMBER

XRJV-U-01-8-8-1-002

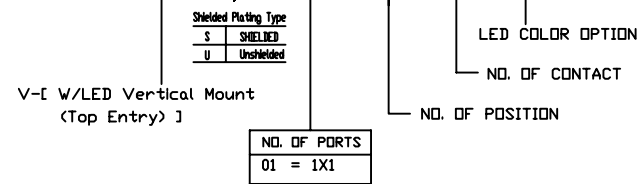

NOTES:

- MATERIALS:**
HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0
CONTACTS: 0.014 INCHES (0.35 MILLIMETERS) THICK PHOSPHOR BRONZE PLATED WITH 150 MICROINCHES (3.81 MICROMETERS) MINIMUM THICK TIN LEAD IN SOLDER AREA. 15 MICROINCHES (0.38 MICROMETERS) MINIMUM GOLD IN LOCALIZED PLATE AREA. ENTIRE CONTACTS PLATED WITH 50 MICROINCHES (1.27 MICROMETERS) MINIMUM THICK NICKEL.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- UNSPECIFIED TOLERANCE: X ±0.25[0.010]
X ±0.30[0.012]

XMULTIPLE		CONNECTING THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu Chlu, Taipei, Taiwan 11475		XMULTIPLE USA 543 Country Club Drive #B 128 Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO: XRJV-U-01-8-8-1-002	
TITLE: RJ45 Jack, w/LED, 8P, 8C, Unshielded, Vertical Mount, Thru-Hole		DRAWN: JEFF	
PART NO: XRJV-U-01-8-8-1-002		CHKD: TARA	
	DIMENSIONS mm [inch]	SHEET 1 of 1	REV 02
		DATE: 20/11/04	