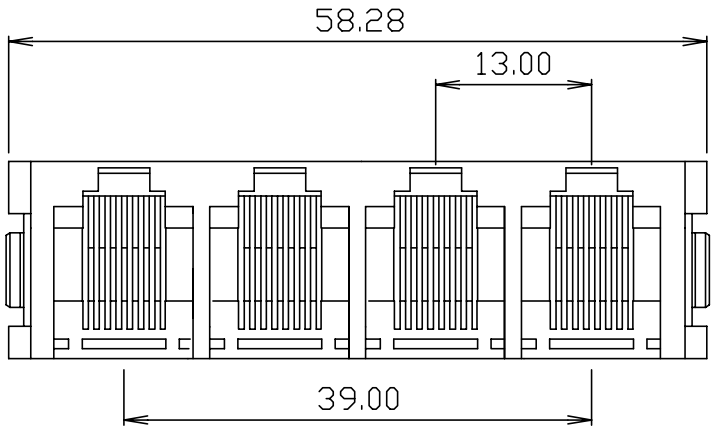

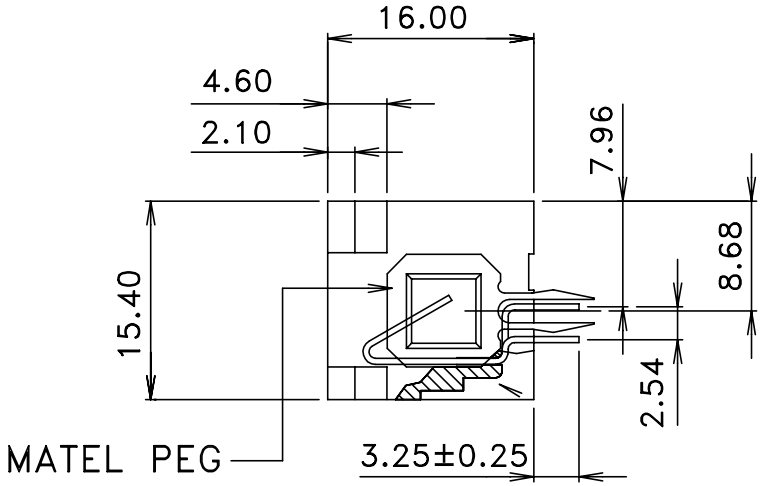

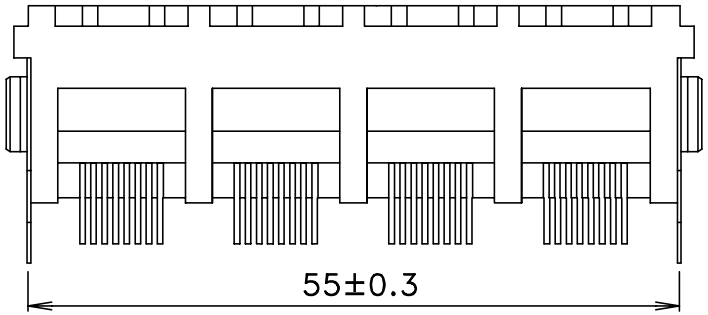

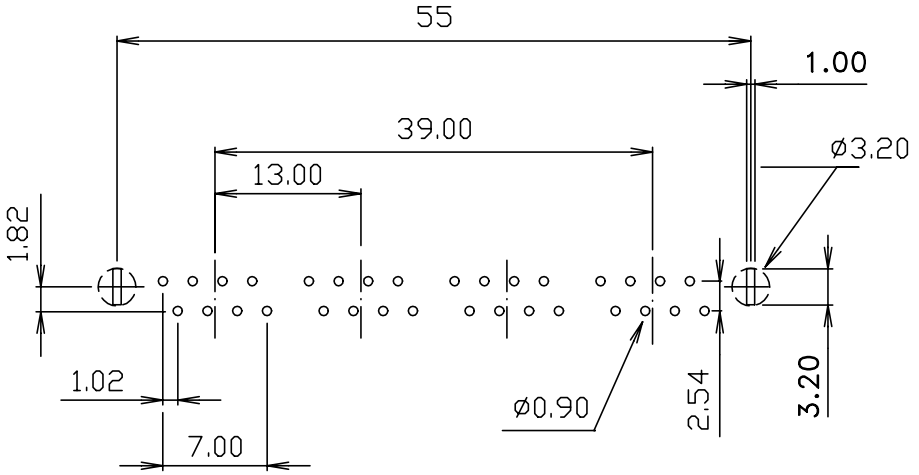

SUGGESTED PCB LAYOUT
TOP VIEW

PCB LAYOUT TOLERANCE
.XX±0.05[0.002]

XRJV-U-04-8-8-0-901

- V-[Vertical Mount (Top Entry)]
- Shielded Plating Type
  - S SHIELDED
  - U Unshielded
- NO. OF PORTS
- NO. OF POSITION
- NO. OF CONTACT
- LED COLOR OPTION
- SERIAL NUMBER

NOTES:

1. MATERIALS:
   HOUSING-PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR-GARY.
   CONTACTS-0.45mm DIAMETER PHOS-BRONZE PLATED WITH 15u" GOLD.
   METAL PEG-0.50mm THICK PHOS-BRONZE PLATED WITH TIN/LEAD.
2. CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.
3. UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
   .X ±0.30[0.012]

XMULTIPLE — CONNECTING THE INFORMATION AGE

XMULTIPLE ASIA
4F, No. 347,Yang Guang St.,
Neihu Chiu , Taipei , Taiwan 11475

XMULTIPLE USA
543 Country Club Drive #B 128
Simi Valley, CA 93065

G/NO: 9660-8801-4

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWG NO: XRJV-U-04-8-8-0-901

TITLE: 8POSITION TOP ENTRY PCB GANG JACK 4 PORTS

DRAWN: TARA

PART NO: XRJV-U-04-8-8-0-901

CHKD: C. TSAI

DIMENSIONS	SHEET	REV
mm[inch]	1 of 1	02

DATE: 23/07/04